


Magna-Frame I

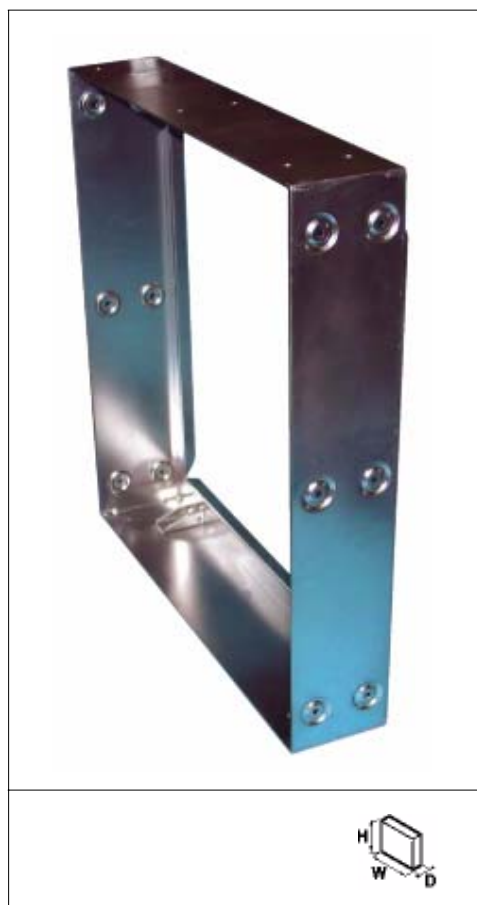

Advantages

- Guaranteed to provide a scannable seal on the downstream side when filter elements are properly installed
- Accepts full size 24" by 24" or 12" by 24" HEPA or ULPA filters

Typical applications: Built-up bank HEPA/ULPA filter frames for installation in HVAC applications in commercial, industrial, manufacturing and medical facilities.

Construction: 14-gauge galvanized steel frame with flat filter seal flange to seal against gasket on HEPA/ULPA filter. Will accept full dimension filters with appropriate swing bolts. Frames are pre-punched for bolt-together assembly. Annular based dimples help to align filter and recess assembly bolts.

Filters: 6" or 12" deep, full size HEPA/ULPA filters.

Additional data: Available in stainless steel, consult factory.

See Product Sheet 2303A for more details.

Holds Gasket Seal Absolute Filter Size (H x W inches 12" or 6" nominal depth)	Holds Gasket Seal Absolute Filter Size (H x W inches 12" or 6" nominal depth)	Per Carton Weight (lbs.)	Per Carton Cube (sq. ft.)	Airflow Standard/High Capacity (cfm)	Swing Bolts Required per Frame
24.00 x 24.00	23.38 x 23.38	20.50	2.78	1100/2000	4
24.00 x 12.00	23.38 x 11.38	13.50	1.50	460/850	4
12.00 x 24.00	11.38 x 23.38	13.50	1.50	460/850	2
24.62 x 24.62	24.00 x 24.00	21.00	2.78	1100/2000	4
24.62 x 12.62	24.00 x 12.00	14.00	1.50	460/850	4
12.62 x 24.62	12.00 x 24.00	14.00	1.50	460/850	2

As part of our program for continuous improvement, Camfil Farr reserves the right to change specifications without notice.